


SPRING WASHER

DIN 127 type B

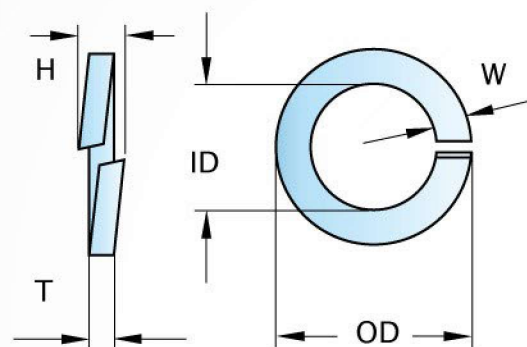

Screw Size	ID		OD Max.	W		T		H	
	Basic	Tol.		Basic	Tol.	Basic	Tol.	Min.	Max.
M2	2.1	+0.3	4.4	0.9	±0.10	0.5	±0.10	1	1.2
M2.5	2.6		5.1	1		0.6		1.2	1.4
M3	3.1		6.2	1.3		0.8		1.6	1.9
M3.5	3.6	+0.4	6.7	1.3	±0.15	0.8	±0.10	1.6	1.9
M4	4.1		7.6	1.5		0.9		1.8	2.1
M5	5.1		9.2	1.8		1.2		2.4	2.8
M6	6.1	+0.5	11.8	2.5	±0.20	1.6	±0.15	3.2	3.8
M8	8.1		14.8	3		2		4.0	4.7
M10	10.2		18.1	3.5		2.2		4.4	5.2
M12	12.2	+0.8	21.1	4	±0.25	2.5	±0.20	5	5.9
M14	14.2		24.1	4.5		3		6	7.1
M16	16.2		27.4	5		3.5		7	8.3
M18	18.2	+1.0	29.4	5	±0.25	3.5	±0.20	7	8.3
M20	20.2		33.6	6		4		8	9.4
M22	22.5		35.9	6		4		8	9.4
M24	24.5	+1.2	40	7	±0.25	4	±0.25	10	11.8
M27	27.5		43	7		5		10	11.8
M30	30.5		48.2	8		6		12	14.2
M33	33.5	+1.5	55.2	10	±0.25	6	±0.25	12	14.2
M36	36.5		58.2	10		6		12	14.2
M39	39.5		61.2	10		6		12	14.2
M42	42.5	+1.5	68.2	12	±0.25	7	±0.25	14	16.5
M45	45.5		71.2	12		7		14	16.5
M48	49		75	12		7		14	16.5