


Attached Table

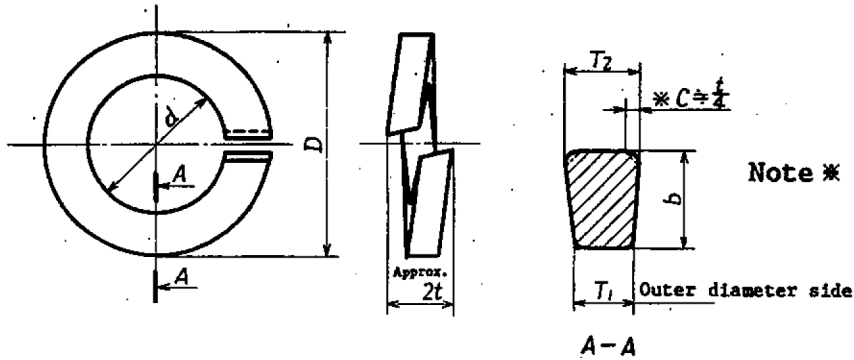

Note * : Chamfer or roundness

Unit: mm

Nominal size	Inner diameter d		Sectional size (Min.)		Outer diameter D (Max.)		Free height after compression test (Min.)		Test load kN {kgf}
	Basic dimension	Tolerances	No. 2 Width b Thickness t	No. 3 Width b Thickness t	No. 2	No. 3	No. 2	No. 3	
2	2.1	+0.25 0	0.9×0.5	—	4.4	—	0.85	—	0.42 { 43}
2.5	2.6	+0.3 0	1 ×0.6	—	5.2	—	1	—	0.69 { 70}
3	3.1		1.1×0.7	—	5.9	—	1.2	—	1.03 { 105}
(3.5)	3.6	+0.4 0	1.2×0.8	—	6.6	—	1.35	—	1.37 { 140}
4	4.1		1.4×1	—	7.6	—	1.7	—	1.77 { 180}
(4.5)	4.6		1.5×1.2	—	8.3	—	2	—	2.26 { 230}
5	5.1		1.7×1.3	—	9.2	—	2.2	—	2.94 { 300}
6	6.1	+0.5 0	2.7×1.5	2.7×1.9	12.2	12.2	2.5	3.2	4.12 { 420}
(7)	7.1		2.8×1.6	2.8×2	13.4	13.4	2.7	3.35	5.88 { 600}
8	8.2		3.2×2	3.3×2.5	15.4	15.6	3.35	4.2	7.45 { 760}
10	10.2	+0.6 0	3.7×2.5	3.9×3	18.4	18.8	4.2	5	11.8 { 1200}
12	12.2		4.2×3	4.4×3.6	21.5	21.9	5	6	17.7 { 1800}
(14)	14.2	+0.8 0	4.7×3.5	4.8×4.2	24.5	24.7	5.85	7	23.5 { 2400}
16	16.2		5.2×4	5.3×4.8	28	28.2	6.7	8	32.4 { 3300}
(18)	18.2		5.7×4.6	5.9×5.4	31	31.4	7.7	9	39.2 { 4000}
20	20.2	+1.0 0	6.1×5.1	6.4×6	33.8	34.4	8.5	10	49.0 { 5000}
(22)	22.5		6.8×5.6	7.1×6.8	37.7	38.3	9.35	11.3	61.8 { 6300}
24	24.5	+1.2 0	7.1×5.9	7.6×7.2	40.3	41.3	9.85	12	71.6 { 7300}
(27)	27.5		7.9×6.8	8.6×8.3	45.3	46.7	11.3	13.8	93.2 { 9500}
30	30.5	+1.4 0	8.7×7.5	—	49.9	—	12.5	—	118 {12000}
(33)	33.5		9.5×8.2	—	54.7	—	13.7	—	147 {15000}
36	36.5		10.2×9	—	59.1	—	15	—	167 {17000}
(39)	39.5	10.7×9.5	—	63.1	—	15.8	—	197 {20000}	

Note (2) $t = \frac{T_1 + T_2}{2}$ where, difference $T_2 - T_1$ shall not exceed the value $0.064 b$. However, b is the minimum value specified in this Table.

Remarks: Nominal sizes given in () should not preferably be used as far as possible.